

Subject: : Tips and Tricks

Topic: : Make you own furlled leader without a jig

Re: Make you own furlled leader without a jig

Author: : afishinado


Date: : 2010/3/24 11:14:45

URL:

I've gotten a lot of PMs about furlled leaders. Here is my latest and greatest method and a diagram for making them. I created it in PP and saved it as a Jpeg. Hopefully the Jpeg will be clear enough to read it.

Attach file:

 **Furlled leaders Afish 2.jpg** (98.92 KB)

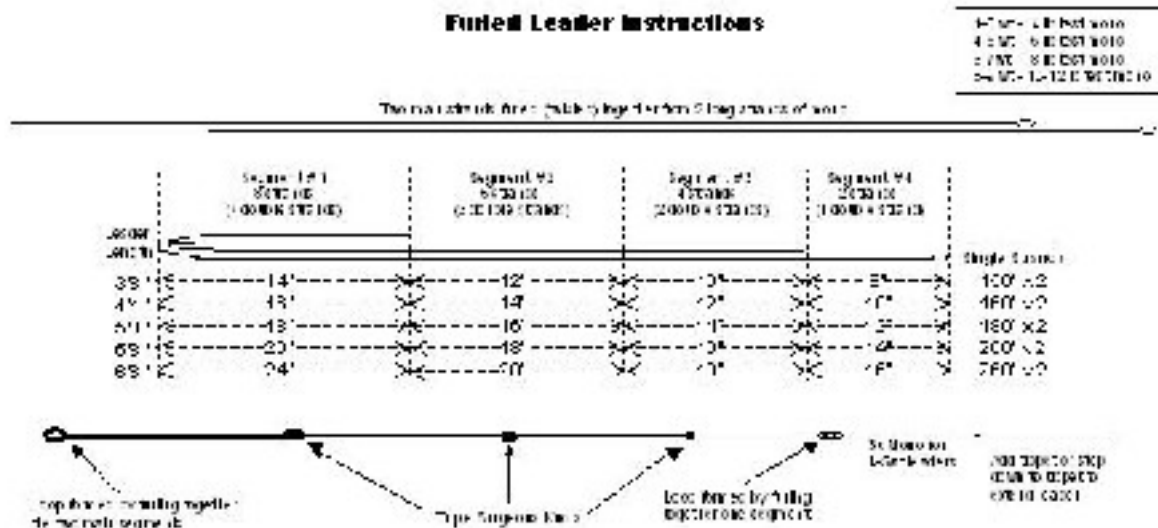

The length of each leader segment is the length of the main segment plus a long segment that is the same length as the top and bottom strands together by building over strand IN THE OPPOSITE DIRECTION. When you get to the end and attach another lead, make it hold together. Do the same for the second segment.

Subsequent to the strand that is secured to the end of the strand together with a thin strip of material to hold them together (see the diagram). For example if the main segment is 12' and the lead is 2' then the end of the main segment is 14'. The 2' lead is furlled IN THE OPPOSITE DIRECTION. This is the furlled leader you are looking for.

Because of the main segment being 12' and the lead 2' the total length is 14'. The lead is furlled in the opposite direction of the main segment. The top strand is furlled in the opposite direction of the main segment. The bottom strand is furlled in the opposite direction of the main segment. The lead is furlled in the opposite direction of the main segment. The lead is furlled in the opposite direction of the main segment. The lead is furlled in the opposite direction of the main segment.

You can make a segment of leader that is 100' long. Use the same method for the other segments. You can make a segment of leader that is 100' long. Use the same method for the other segments. You can make a segment of leader that is 100' long. Use the same method for the other segments.

I usually use a 100' leader for the main segment and the lead. I usually use a 100' leader for the main segment and the lead. I usually use a 100' leader for the main segment and the lead.